


NYLATRON® GSM Blue PA6

**SIMPLY NO
SUBSTITUTE**

BEARING GRADE EXCELS IN HIGH PRESSURE AND AT LOW SPEEDS

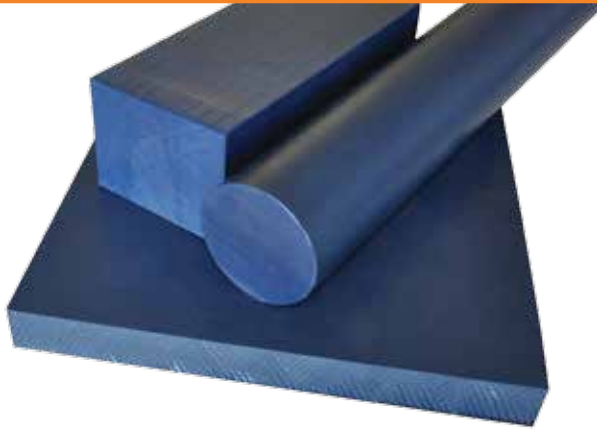


Nylatron® GSM Blue PA6 is the first cast Nylon to combine both molybdenum disulfide (MoS2) and oil. With the load capability of Nylatron® GSM PA6 Nylon plus improved frictional characteristics, Nylatron® GSM Blue PA6 excels in higher pressures and at low speeds (up to 40 fpm). It offers 20% lower coefficient of friction, 50% greater limiting PV, and a lower “k” factor than Nylatron® GSM PA6 – making Nylatron® GSM Blue PA6 ideal for slide pads, thrust washers and trunion bearings. Nylatron® GSM Blue PA6 is dark blue in color and should be considered for any oil-filled Nylon application.

Key Benefits

- MoS2 and oil filled
- Improved frictional characteristics
- Excels in higher pressures and at low speeds-up to 40 fpm
- Lower coefficient of friction, greater limiting PV, and a lower “k” factor than Nylatron® GSM PA6

Availability

- Shapes:**
- Sheet/Plate
 - Rod
 - Tube
 - Near Net Shapes

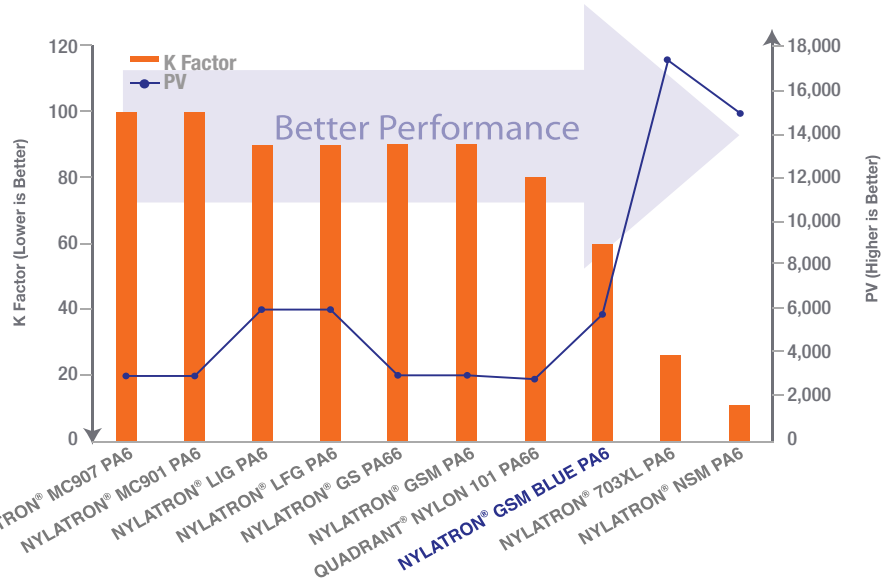

Aceltron® GP
 Duratron® PAI, PEI, PI, PBI
 Ertalyte® PET-P
 Fluorosint® PTFE
 Ketron® PEEK
 Nylatron® PA6, PA66
 Sanalite® HDPE/PP
 Semitron® ESD
 Techtron® PPS
 TIVAR® UHMW-PE

NYLATRON® GSM Blue PA6

PA PRODUCT APPLICATION

The difference between the static and dynamic COF's indicates "slip-stick." A large difference indicates high slip-stick, and a low (or no) difference indicates low slip-stick. Slip-stick characteristics are important for applications which move intermittently, or require a back-and-forth motion. For a low slip-stick plastic, look to Nylatron® GSM Blue PA6 and Nylatron® 703XL PA6.

TIPS

GUILLOTINE WATER GATE GUIDE

Application: This application is for a wear strip in a very unique gate valve which is used to control the water levels in adjoining bodies of water.

Benefits: The moisture resistance of plastic, combined with its good wear factor makes this Nylatron® GSM Blue PA6 valve more resistant to corrosion and friction than steel.

Data Sheet - NYLATRON® GSM Blue PA6

	Property	Units	Test Method	Typical Average Value
Mechanical Properties	Specific Gravity @ 73°F	-	ASTM D792	1.15
	Tensile Strength @ 73°F	psi	ASTM D638	6,000
	Tensile Modulus of Elasticity @ 73°F	psi	ASTM D638	500
	Tensile Elongation (at break) @ 73°F	%	ASTM D638	30
	Flexural Strength @ 73°F	psi	ASTM D790	15,000
	Flexural Modulus of Elasticity @ 73°F	psi	ASTM D790	500
	Shear Strength @ 73°F	psi	ASTM D732	-
	Compressive Strength @ 10% Deformation @ 73°F	psi	ASTM D695	13,000
	Compressive Modulus of Elasticity @ 73°F	psi	ASTM D695	425
	Hardness, Rockwell, Scale as Noted @ 73°F	-	ASTM D785	117
	Hardness, Durometer, Shore "D" Scale @ 73°F	-	ASTM D2240	-
	Notched Izod Impact @ 73°F	ft. lb./in. ²	ASTM D256 Type A	0.9
	Coefficient of Friction - (Dry vs. Steel) Dynamic	-	QTM 55007	0.18
	Limiting PV with 4:1 safety factor applied	ft. lb., in. ² - min	QTM 55007	5,500
	Wear Factor K x 10 ⁻¹⁰	TIVAR®1000=100	QTM 55010	6
Thermal Properties	Coefficient of Liner Thermal Expansion (-40°F to 300°F)	in./in./°F	ASTM E831 (TMA)	65.0 x 10 ⁻¹⁰
	Heat Deflection Temperature @ 264 psi	°F	ASTM D648	200 °F
	Tg-Glass Transition (amorphous)	°F	ASTM D3418	-
	Melting Point (crystalline) peak	°F	ASTM D3418	420 °F
	Continuous Service Temp in Air (Max.) ⁽¹⁾	°F	-	200 °F
	Thermal Conductivity	BTU in./(hr. ft. ² °F)	F433	-
Electrical Properties	Dielectric Strength (Short Term)	Volts/mil	ASTM D149	-
	Surface Resistivity	ohms/square	EOS/ESD S11.11	>10 ¹³
	Dielectric Constant, 10 ⁶ Hz	-	ASTM D150	-
	Dissipation Factor, 10 ⁶ Hz	-	ASTM D150	-
	Flammability @ 3.1mm (1/8 in.) ⁽³⁾	-	UL94	-
Other	Water Absorption Immersion, 24 Hours	% by wt.	ASTM D570 ⁽²⁾	0.3
	Absorption Immersion, Saturation	% by wt.	ASTM D570 ⁽²⁾	6

- (1) Data represents Quadrant's estimated maximum long-term service temperature based on practical field experience.
 (2) Specimens: 1/8" thick x 2" diameter or square.
 (3) Estimated rating based on available data. The UL-94 Test is a laboratory test and does not relate to actual fire hazard.

All statements, technical information and recommendations contained in this publication are presented in good faith, based upon tests believed to be reliable and practical field experience. The reader is cautioned, however, that Quadrant Engineering Plastic Products does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of Quadrant's products in any given application. Acetron, CleanStat, Corzan, Duraspin, Duratron, Ert, Ertacetal, Ertalene, Ertalon, Ertalyte, Extreme Materials, Fluorosint, Ketron, MC, Monocast, Novatron, Nylatrack, Nylatron, Polypenco, Proteus, Sanalite, Semitron, Techtron, TIVAR, Ultrawear and Vibratuf are registered trademarks of the Quadrant group of companies.

* Classix is a registered trademark of Invia Ltd. Corp. * Rulon is a registered trademark of Saint Gobain Performance Plastics
 * Torlon and Udel are registered trademarks of Solvay Advanced Polymers * Vespel, Delrin and Teflon are registered trademarks of E.I. DuPont
 * Noryl and Lexan are registered trademarks of GE Plastics * Celazole is a registered trademark of PBI Performance Products, Inc.
 * Kynar is a registered trademark of Arkema * Corzan is a registered trademark of Noveon

Design and content created by Quadrant Engineering Plastic Products and are protected by copyright law. Copyright © 2016 The Quadrant group of companies. All rights reserved.
 00923 | 2.8.16 | 500



Distributed by:

